



HD Series

Cold Water Pressure Washers

North America's #1 Brand of High-Pressure Cleaning Equipment

Gasoline / Modular Design Belt or Direct Drive Models

Durable weld free, corrosion resistant **aluminum frame**

Low profile **handle** is easy to push and pull

Durable VRT3 **unloader** with bypass loop diverts water flow when trigger gun is not activated

Five, high-pressure **stainless steel nozzles**: 0°, 15°, 25°, 40° and a detergent nozzle

Fatigue-free spring-loaded **trigger gun** with insulated spray wand and side handle making for easy point-and-shoot cleaning action

Reliable **Honda GX** commercial-duty gasoline engines with 3-year warranty

Downstream detergent injection allows remote detergent injection

Heavy-duty Triplex pump comes with 7-year warranty

Flat free tires are puncture proof and ready to roll when you need them

50 ft. wire-braided hose includes guards, couplers and swivels at both ends

Electric start models include battery

FEATURES

- 3 to 4 GPM / 2700 to 4100 PSI
- Honda gasoline engines
- Modular design for easy transition between cart and skid style
- Recoil or electric-start gas-engine models



Direct-drive HD 3.0127 AG model shown as skid

HD SERIES Cold Water Models

- 6.5-13 HP Honda engines
- 3 to 4 GPM @ 2700 to 4100 PSI
- Compact / modular design
- 7-yr Hotsy pump warranty

The Hotsy HD Series: Modular Pressure Washers Offering Powerful Cold-Water Cleaning

SPECIFICATIONS

MODEL	GPM	PSI	CC's (HP)	ENGINE	START	PUMP MODEL	DRIVE	HOSE	DIMENSIONS	SHIP WT (lbs)
HD 3.0/27 G	3.0	2700	196 (6.5)	Honda GX200	RECOIL	LP3035	DIRECT	50'	41"Lx22"Wx24"H	112
HD 3.5/35 G	3.5	3500	270 (9)	Honda GX270	RECOIL	LP3535G.1	DIRECT	50'	41"Lx22"Wx24"H	130
HD 4.0/40 G	4.0	4000	389 (13)	Honda GX390	RECOIL	LS4040G.3	DIRECT	50'	43"Lx26"Wx27"H	149
HD 4.0/40 Ge*	4.0	4000	389 (13)	Honda GX390	ELECTRIC	LS4040G.3	DIRECT	50'	43"Lx26"Wx27"H	158
HD 3.0/27 GB	3.0	2700	196 (6.5)	Honda GX200	RECOIL	LP3035G	BELT	50'	41"Lx22"Wx24"H	123
HD 3.5/35 GB	3.5	3500	270 (9)	Honda GX270	RECOIL	LM3540R.3	BELT	50'	41"Lx22"Wx24"H	156
HD 4.0/40 GB	4.0	4000	389 (13)	Honda GX390	RECOIL	LM3840R.3	BELT	50'	43"Lx26"Wx27"H	160
HD 4.0/40 GeB*	4.0	4000	389 (13)	Honda GX390	ELECTRIC	LM3840R.3	BELT	50'	43"Lx26"Wx27"H	196


*Battery included

OPTIONS FOR THE HD SERIE

Select HD pressure washers can be mounted on one of the following skids for mobile cleaning anywhere. Fits within a standard UTV / ATV bed or truck.*



Skid with 100' Hose Reel & 50 Gallon Tank

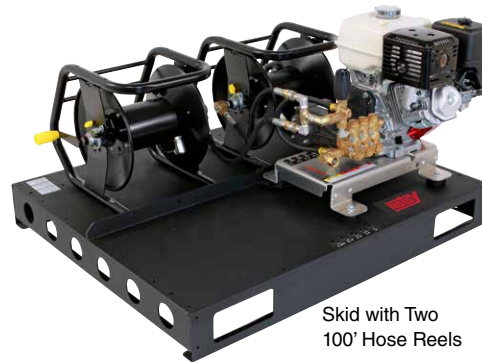

Skid with Two 100' Hose Reels

Dimensions 40" L x 48" W x 35" H

*Skids compatible with the following models:

- HD 3.0/27 G
- HD 3.5/35 G
- HD 4.0/40 G

Additional options available:

- Skid Mount Feet
- Pallet Skid
- Hose Storage
- Hose Reel
- 37.5" Handle
- Gun Storage

SERVICE & REPAIR

Hotsy has factory-trained service technicians who will provide on-site maintenance for your cleaning equipment. Our techs have most common replacement parts on their service truck, and will quickly have your washer running smoothly.



FIND OUT MORE ONLINE: HOTSY.COM

DON'T FORGET THE SOAP!

Hotsy pressure washers clean best when matched with specially formulated Hotsy detergents. Nearly all contain Hotsy's exclusive advanced-formula HCC additives to help prevent scale build-up and to fight corrosion in your equipment. All are highly concentrated, so a little goes a long way.



hotsy *Nothing Cleans Like a Hotsy!*

Tel: (800) 525-1976 Fax: (888) 880-9631
www.Hotsy.com email: info@Hotsy.com

P/N HOT_HDSG Effective 04/18

Specifications & product descriptions subject to change without notice.

Hotsy's manufacturing facilities have established and apply a quality and environmental management system to be ISO 9001:2008 and ISO 14001:2001 certified.

A member of KÄRCHER North America



©2018 Hotsy

NOTE: We are constantly improving and updating our products. Consequently, pictures, features & specifications in this brochure may differ slightly from current models. Flow rates & pressure ratings may vary due to variances allowed by manufacturers of our machine components. We meet the CETA testing specs for machine performance at $\pm 10\%$ and in some cases are tighter within $\pm 5\%$ of listed specifications.

Distributed by: